


OEM

# MSL-2001

## Laser Barcode Scan Engine

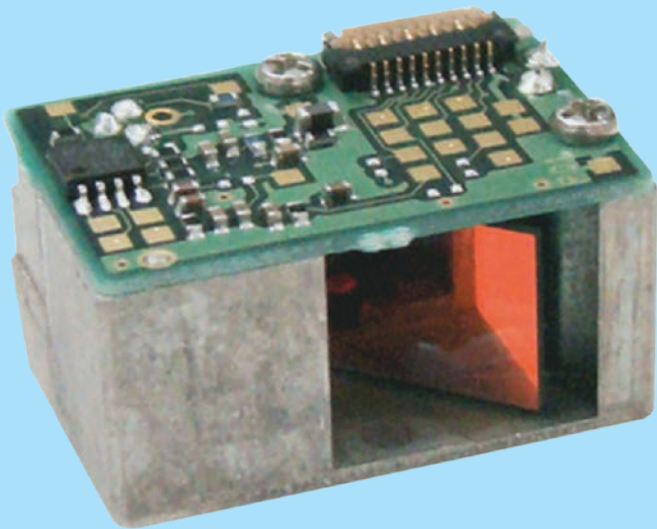

### Highlights

- Undecoded laser barcode scan engine
- Features a 650 nm visible laser diode that scans bi-directionally
- Extremely fast scan rate of 100 scans/second
- Small size makes it easy to mount and integrate into space constrained areas
- Serial CMOS via 12 pin FFC connector
- Programmable software with a wide variety of options
- Low profile scan engine—dimensions of 0.80" x 0.43" x 0.71", weighs 0.14 ounces
- Engineering kit available – enables faster time to market
- Two year warranty

# MSL-2001

## Product Specifications

### COMMUNICATION

**SERIAL CMOS:** 10 pin FFC connector

### POWER

**VOLTAGE REQUIREMENT:** 3.3V  $\pm$  10%

**CURRENT CONSUMPTION:** Maximum 75mA

### BARCODE SCANNER OPTICS

**LIGHT SOURCE:** 650 nm visible laser diode

**SCAN METHOD:** Bi-directional scanning

**SCAN RATE:** 100 scans/sec

**READING PITCH ANGLE:** -35 to 0°, 0 to +35°

**READING SKEW ANGLE:** -50 to -8°, +8 to +50°

**READING TILT ANGLE:** -20 to 0°, 0 to +20°

**CURVATURE:** R>15 mm (EAN8), R>20 mm (EAN13)

**MINIMUM RESOLUTION AT PCS 0.9:** 5 mil (0.127 mm)

**MINIMUM PCS VALUE:** 0.45

**DEPTH OF FIELD: AT PCS 0.9 CODE 39:**

39 mil (1.0 mm) 2.76 - 21.65 in (70 - 550 mm)

20 mil (0.5 mm) 1.97 - 14.96 in (50 - 380 mm)

10 mil (0.25 mm) 1.97 - 9.06 in (50 - 230 mm)

6 mil (0.15 mm) 1.97 - 5.12 in (50 - 130 mm)

5 mil (0.127 mm) 2.36 - 4.33 in (60 - 110 mm)

### DURABILITY

#### TEMPERATURE:

Operation: -4 to 149 °F (-20 to 65 °C)

Storage: -22 to 158 °F (-30 to 70 °C)

#### HUMIDITY:

Operation: 5 - 90% (non-condensing)

Storage: 5 - 90% (non-condensing)

#### AMBIENT LIGHT IMMUNITY:

Fluorescent: 4,000 lx max

Direct sun: 80,000 lx max

Incandescent: 4,000 lx max

**DROP TEST:** packed in dummy case 6 ft (1.8 m) drop onto concrete surface

**MBTF:** 30,000 hours except laser diode (10,000 hours) and except mirror scan unit (10,000 hours)

### PHYSICAL

**DIMENSIONS (WXHxD):** 0.80 x 0.43 x 0.71 in (20.4 x 11 x 18.0 mm)

**WEIGHT BODY:** Ca. 0.14 oz (3.9 g)

### REGULATORY AND SAFETY

**PRODUCT COMPLIANCE:** RoHS, JIS-C-6802 Class 2, IEC 60825-1 Class 2

### SOLD SEPARATELY

**MEK1000 SDK:** Development board, Getting started disc, RS232 cable

#### CONNECTION CABLE, POWER SUPPLY:

100-240V/0.5A, 50/60 Hz, 5V/2a

© Copyright Opticon. All rights reserved. This information is subject to change without prior notice. For availability, contact your local representative. MSL-2001\_060216

